

Clippard

HV Toggle & Stem Valve Series



Medium: Air

Input Pressure: 150 psig max.

Air Flow: 6.5 scfm @ 50 psig; 11.8 scfm @ 100 psig

Temperature Range: 32 to 230°F (0 to 110°C)

Force for Full Stem Travel: 4 1/2 lb. nominal

Stem Travel: 1/8"

Mount: Cartridge, inserts into a 1/2" bore

Stem: Stainless Steel

Seals: Nitrile

Toggle: Electroless Nickel-Plated Steel


Available in 4-way stem or toggle configurations, these valves feature the same benefits available with other Minimatic® brass valves: proven reliability, compact size, economical pricing, precision machining and more. The HV-4 series vents its exhaust ports to atmosphere and is ideal for powering simple cylinder applications.

- Small, compact size, lightweight
- Design flexibility and fast response
- Clippard standard stem option available for use with interchangeable actuators (see www.clippard.com for complete line)
- 15/32-32 male thread for panel mounting
- Bright dipped brass construction for long life and corrosion resistance
- Stainless steel stems and springs for corrosion resistance
- Exhaust to atmosphere


Part No.	Description
HV-4C	4-Way Stem Cartridge Valve
HTV-4C	4-Way Cartridge Valve, ENP Steel Toggle

Professionally Distributed by:

HV-4C



HTV-4C

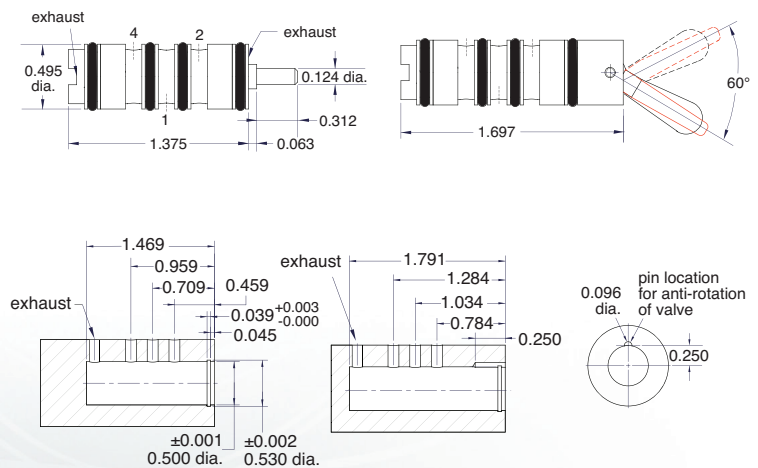

* Minimatic is a registered trademark of Clippard Instrument Laboratory, Inc.

Clippard Instrument Laboratory, Inc.

7390 Colerain Avenue • Cincinnati, OH 45239 • 877-245-6247 • 513-521-4261 • Fax 513-521-4464 • www.clippard.com

Technical Data Bulletin 6.13 v.2